



**FS form-scaff**  
Formwork & Scaffolding Solutions

**FS plywood**

Structural Plywood for Concrete Forming

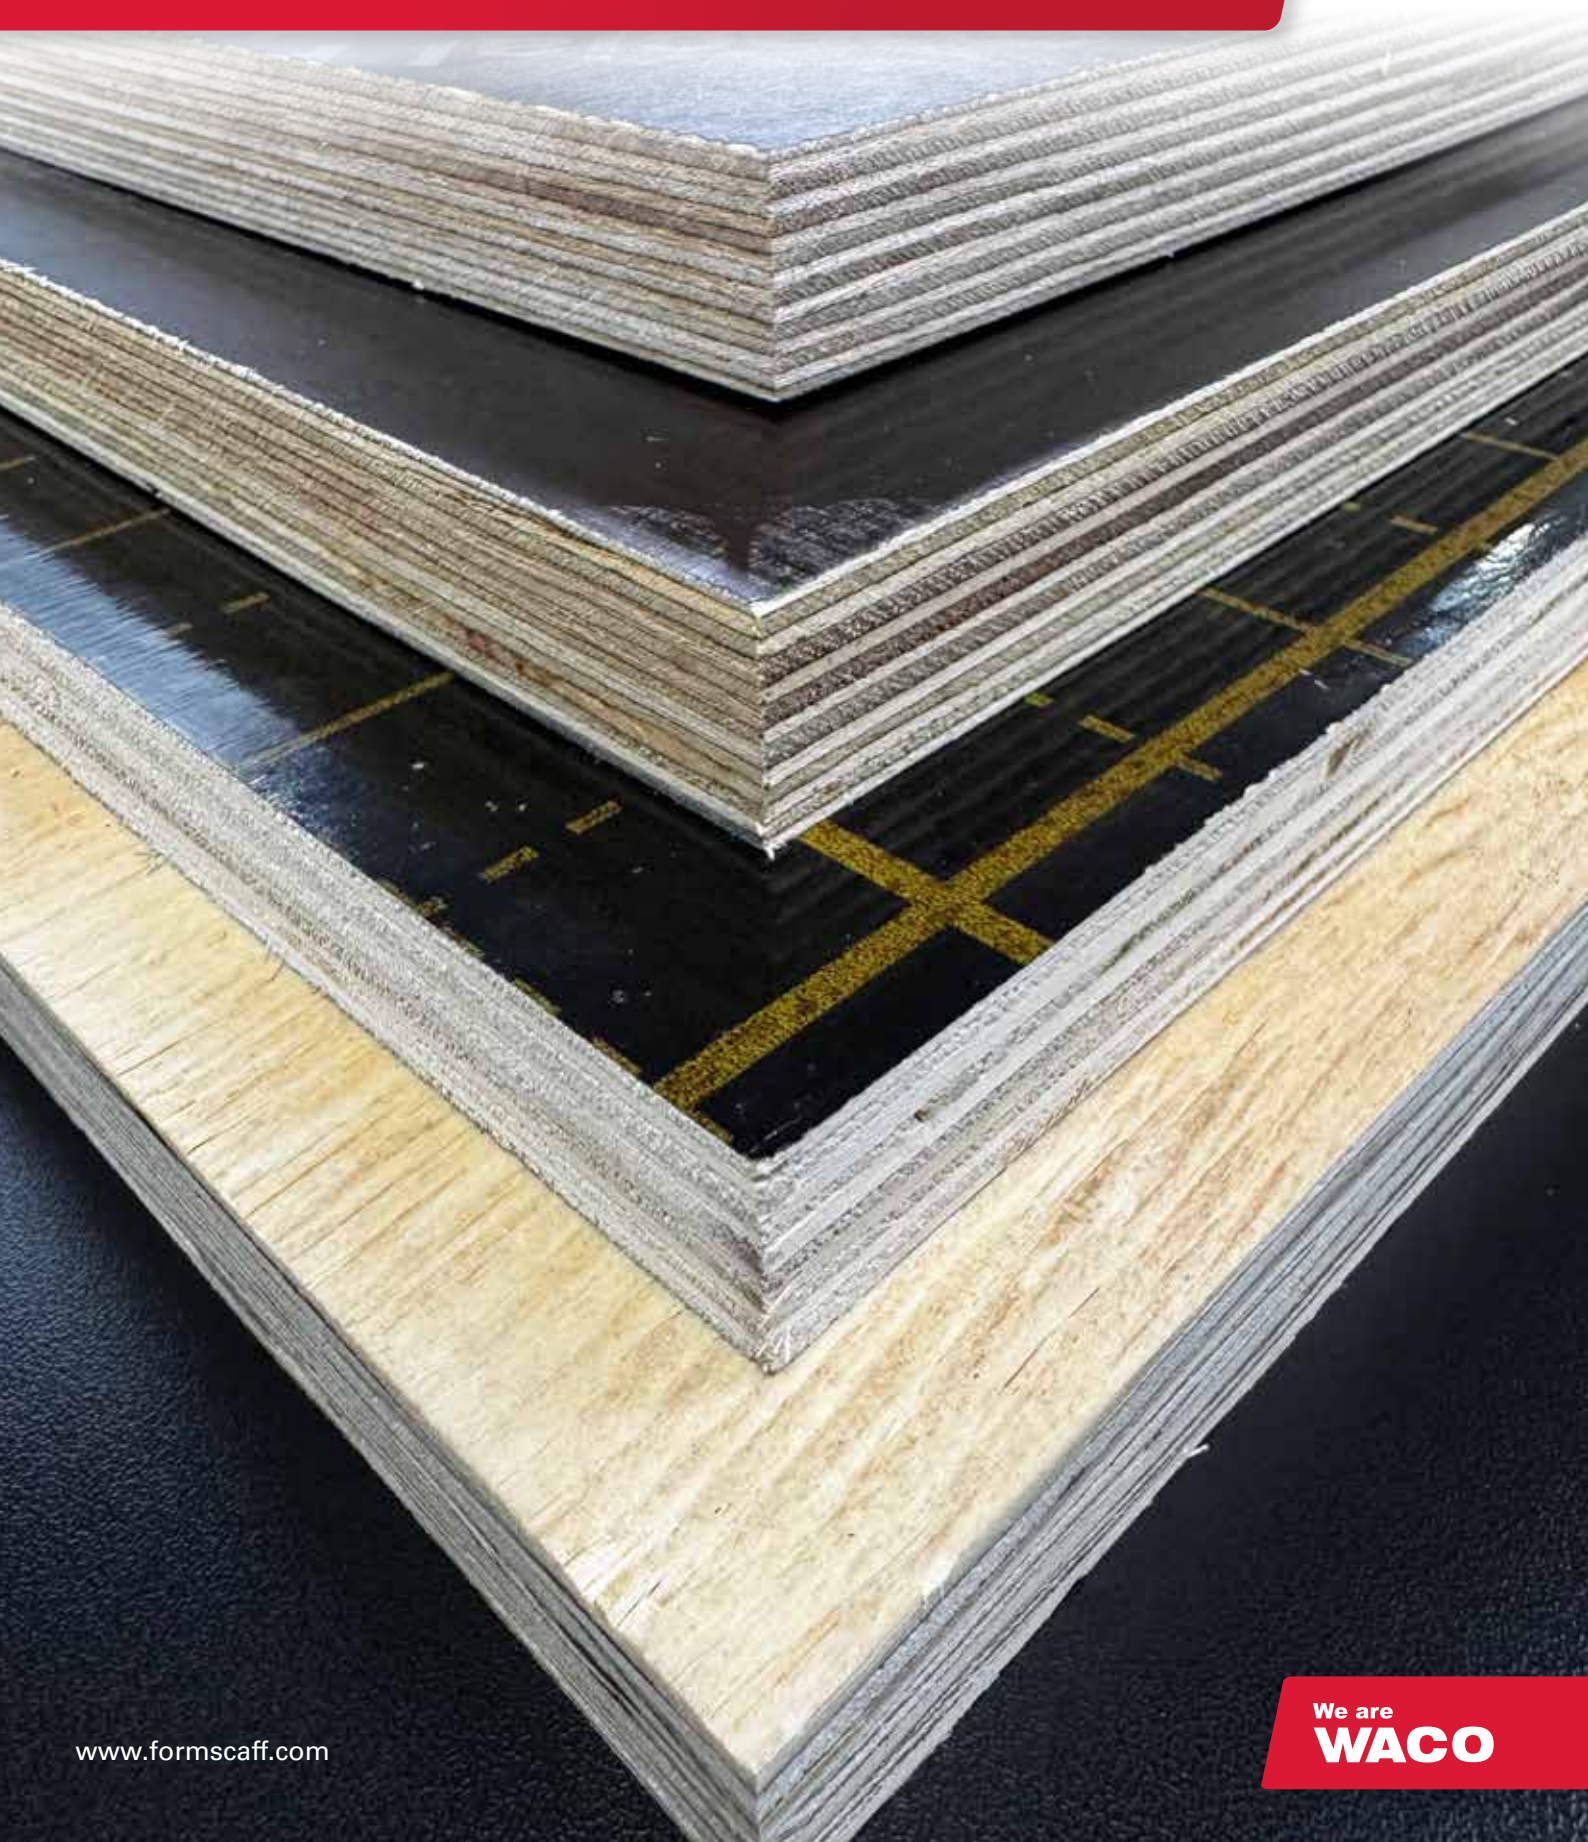

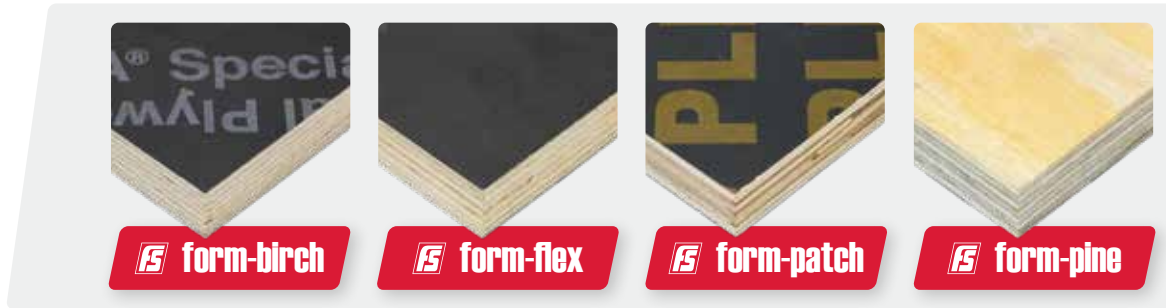

Type	Quality	Premium	Medium	Standard	Uncoated
	Re-Used*	Up to 40	Up to 12	Up to 5	Varies
	* The given number of re-uses are indicative values, the actual number may vary depending on the application and site conditions.				
	Origin	Eurasia	Asia	Asia	South America/ Local SA
	Standard	EN315	EN314-1/-2, EN310	Chinese Local Standard	SANS 929:2008 or Other
Applications	Walls, Slabs & Climbing Formwork	Decking & Patch	Patching & Foundations	Decking & Patching	
Core	Wood	Birch	Poplar	Fresh Poplar/ Eucalyptus	Pine
	Number of Veneers <small>Only applies to 21mm Plywood</small>	15	13	11 to 13	Varies
	Veneer Type	Full Size Single Veneer	Poplar 127*64/84cm	3/4 Jointed	Varies
	Glue	Phenol Resin	WBP Phenolic	WBP Melamine	WBP Phenolic
	Boiling Time (hr)	450	72	4	Varies
Surface	Coating	Dynea Brown Film	Dynea Brown Film	Chinese Film	Uncoated
	Film (g/m <sup>2</sup> )	220 & 120	120	180	Uncoated
	Edge Sealing	Acrylic Phenol Varnish	BengTeng Paint	Paint	Uncoated
Sizes	Dimension (mm)	2500 x 1250 x 21	2500 x 1250 x 21	2500 x 1250 x 21	2440 x 1220 x 21 (50)
		15.44 kg/m <sup>2</sup>	12.16 kg/m <sup>2</sup>	12.9 kg/m <sup>2</sup>	11.42 kg/m <sup>2</sup>
	Mass (kg/m <sup>2</sup> )	5120168	5120191	5120060	3500325
		2700 x 1220 x 21		2440 x 1220 x 18	2440 x 1220 x 18 (50)
	Product Code	15.44 kg/m <sup>2</sup>		9.74 kg/m <sup>2</sup>	9.74 kg/m <sup>2</sup>
		5120160		5120203	3500327
Tolerance (mm)	-0.9 / +0.7	±0.5	±1.0	±0.5	
Sheets Per Bundle	19	43	40	55	

